




# Microsoft Surface Book Keyboard USB Port Replacement

Replace your faulty USB Port in order to read USB devices again.

Written By: Natalie Weisenburger

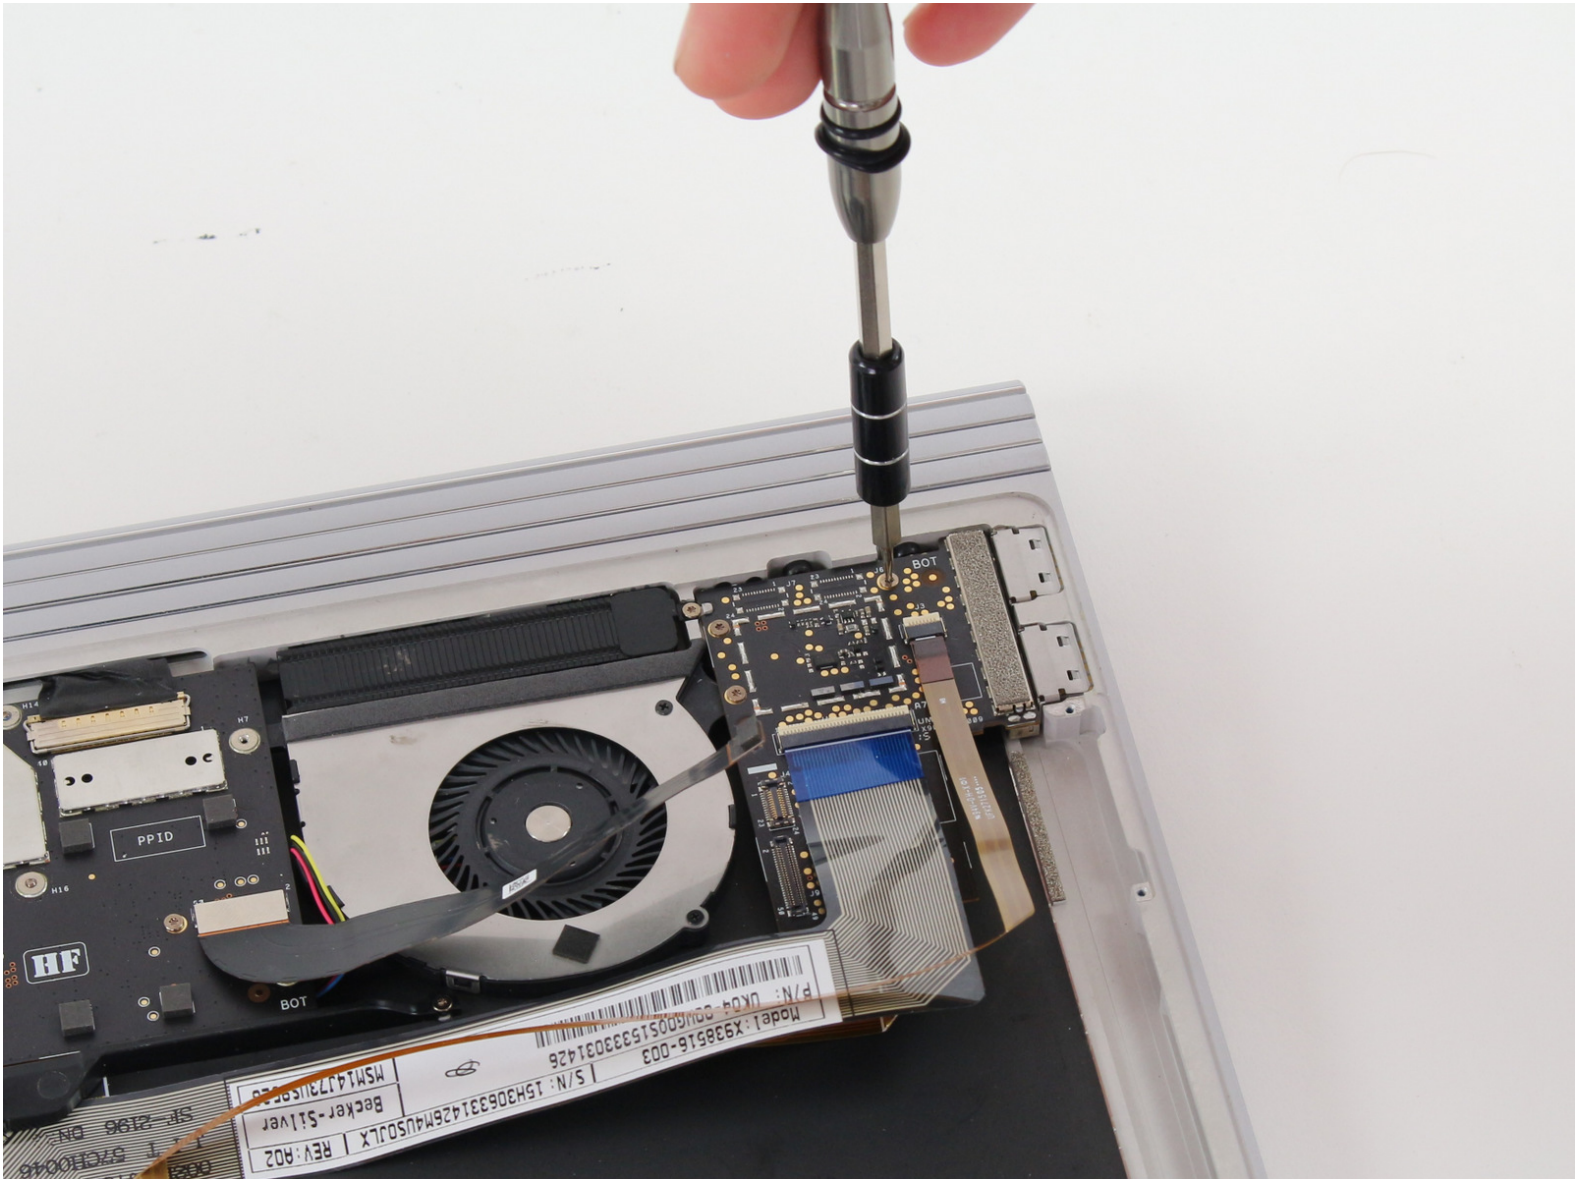

## INTRODUCTION

You will learn how to replace the USB 3.0 port hub with a new one. This will require you to remove the back panel. It is not necessary to remove the SD Card to get to the USB card.

The USB port is a way to recognize devices on your laptop. If it is damaged, you no longer have the option to read devices via a cord.



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T3 Torx Screwdriver](#) (1)
-

## Step 1 — Back Panel



- Flip the keyboard over so you can see the back panel.

## Step 2



- Insert the plastic opening tool in the crevice between the panel and the keyboard.
- Apply some pressure and lift up so that the back panel is pried away from the keyboard.
- ⓘ The panel is glued down on the inside so this may require some force to lift away the panel.
- Continue to lift until the panel is completely separated from the keyboard.
- ⓘ The panel is still attached to the keyboard by a ribbon cable so only lift the panel a few inches.




## Step 3




- Lift the panel away with the ribbon cable still attached and set aside the panel so that you can work on other components.

## Step 4 — USB Port

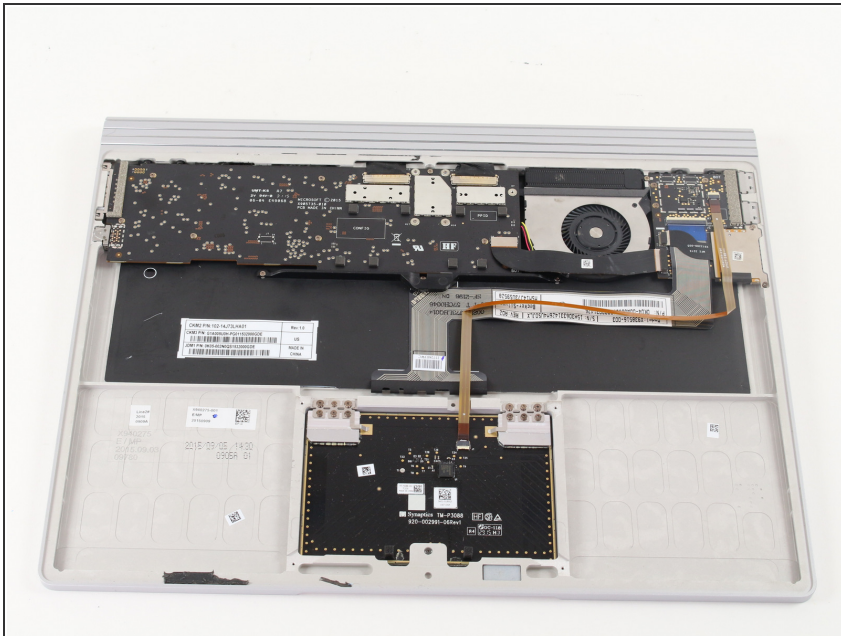



- Orient your keyboard with the internals facing up and the USB Port on the right.

## Step 5

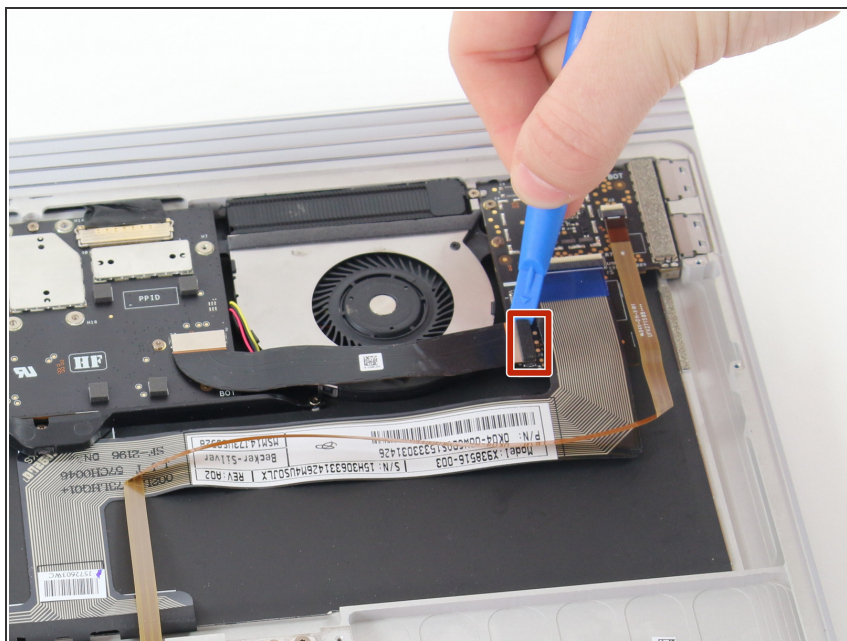

- Use a plastic opening tool and remove the tab from the USB board


## Step 6

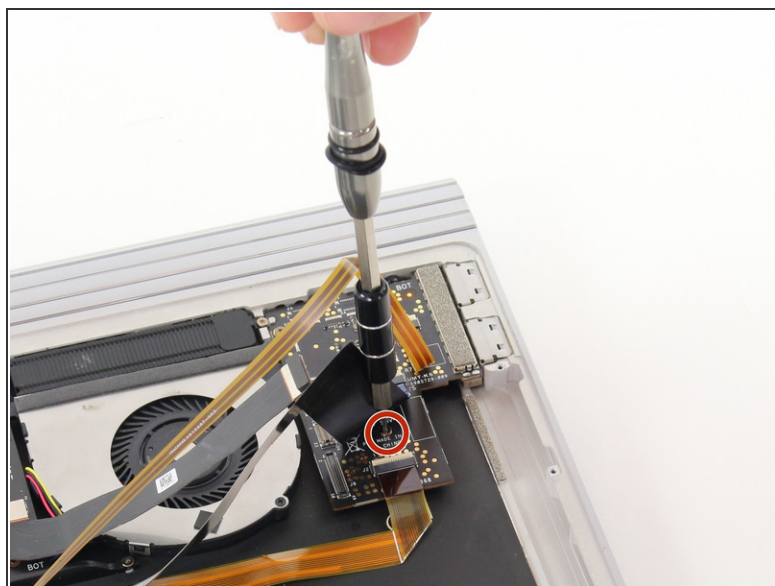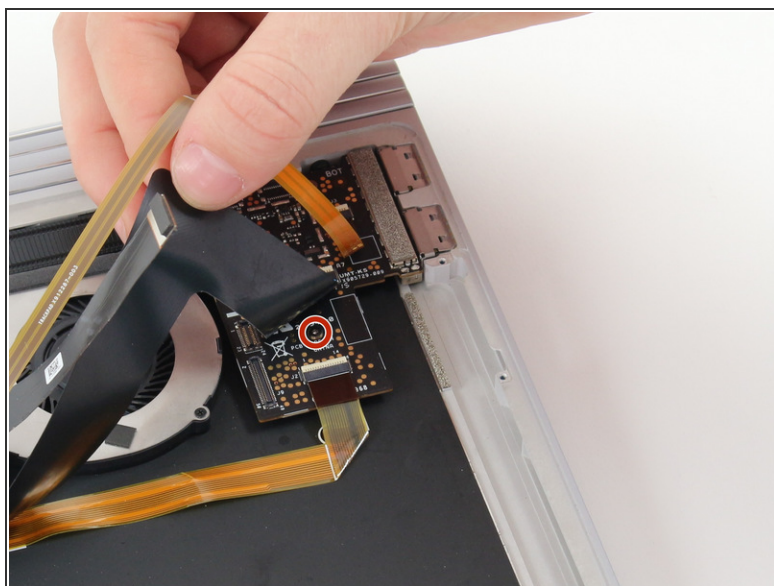

- Lift up the black and gold wires and find the screw hidden there.
- Use the T3 Torx Screwdriver and remove the four mm screw.





## Step 7

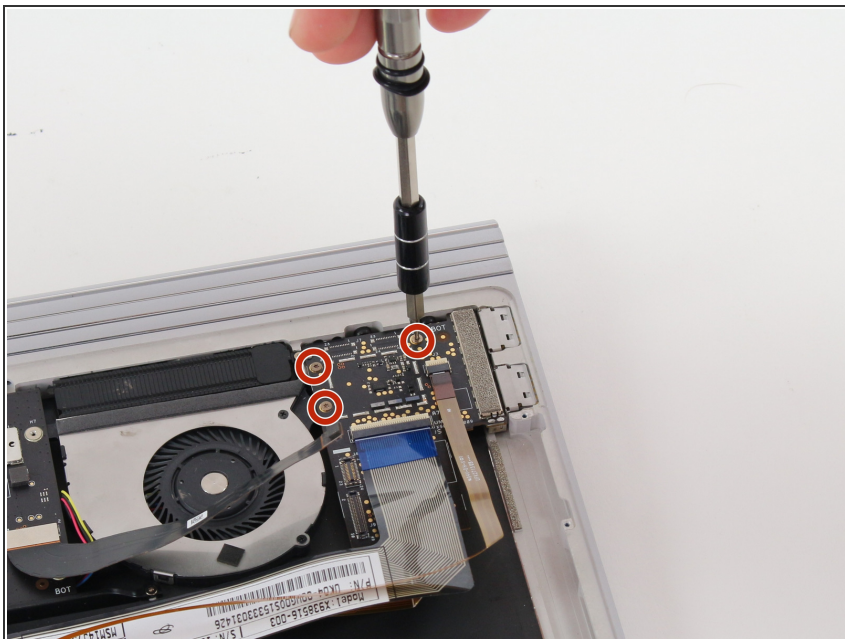

- Use the T3 Torx Screwdriver to remove the remaining three 4 mm screws.

## Step 8

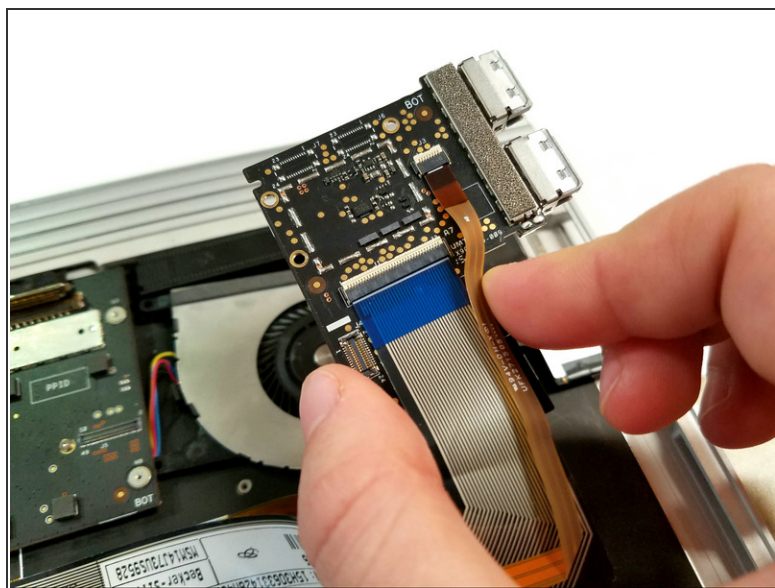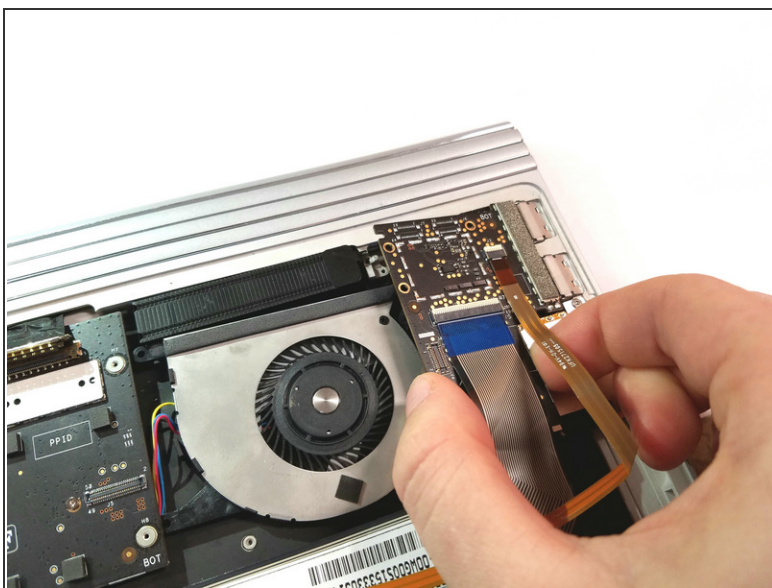

- Wiggle the USB Port board away from the keyboard.

 This may require some force.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 04:15:14 PM.